

Decorative & Privacy Screens / Panels

Australia's largest manufacturer of decorative & privacy screens & panels





About QAQ



QAQ is the largest wholesale manufacturer of decorative screens and panels within Australia.

Specialising in designing and manufacturing screens for Interior and Exterior zones.

We work alongside Architects, Interior designers, landscapers and builders to deliver visually appealing commercial and domestic fit outs.

As a result we have a strong national and international distribution network.

We are Australian made and owned business located in Derrimut, Victoria (20km West of Melbourne).

Our mission is to provide visually aesthetic and cost-effective solutions to the public through our wholesale network.

"A screen for every space & every place"



Projects




Valencia design, which features a 60% block-out rating. The Geometric Structure of the Valencia has been modularly cladded to ceate a continuous contemporary facade. (Images courtesy of Markscon)



Pretoria design, which features a 70% block-out rating. Screens were designed to give privacy as well as landscaping flair. (Images courtesy of Love it Landscapes)

Gallery

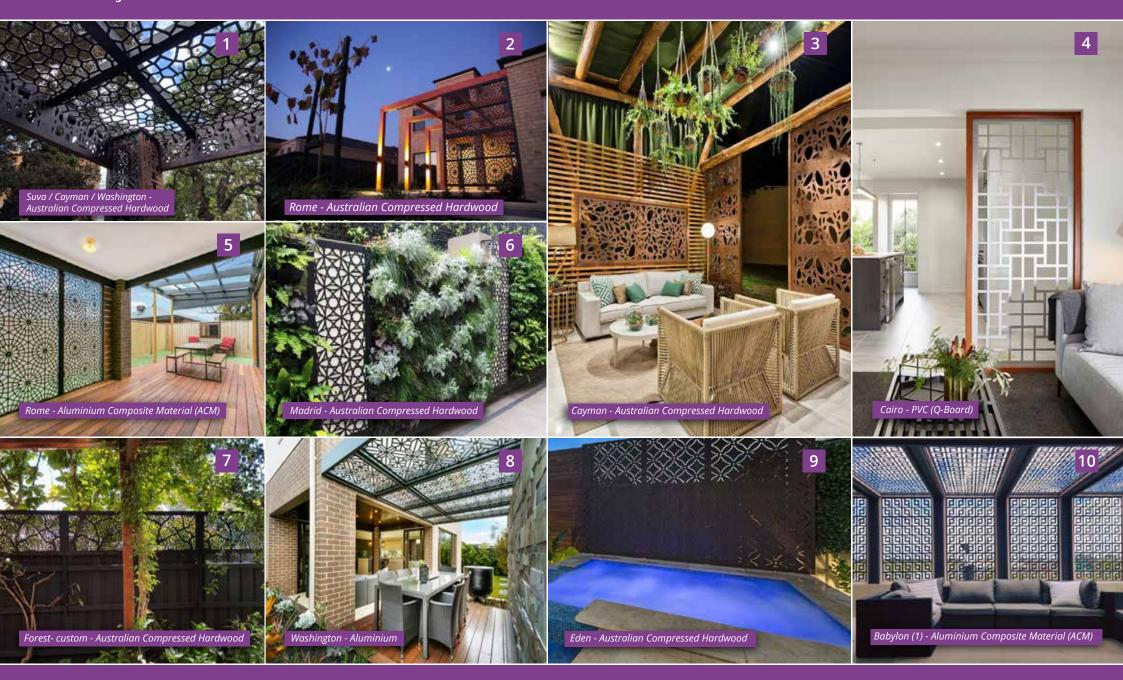

Screen Materials

AUSTRALIAN COMPRESSED HARDWOOD (WEATHERTEX)

Weathertex Compressed Hardwood comprises of 97% timber and 3% Natural wax. It comes in two different finishes, Smooth and Woodsman (Treelike Emboss). For added UV protection it can be sealed in Jarrah or Charcoal Finish. Weathertex comes with a 7 year warranty against rotting splitting and cracking.



Smooth

Raw









Sealed Jarrah



Sealed Jarrah

Smooth Sealed Charcoal

Woodsman Raw

Woodsman Sealed Charcoal

Max size: 3600 mm x 1200 mm **Application:** Indoor or Outdoor Thickness: 9 mm

Finish: Smooth / Woodsman

CORTEN (RUSTING STEEL)

Corten is a high-strength steel that when exposed to the weather forms a natural surface rust.









0 davs

2 Weeks

1.5 Months 6 Months

Max size: 3000 mm x 1200 mm **Application:** Indoor or Outdoor

Thickness: 1.6 mm/2 mm/3 mm

Finish: Raw

ALUMINIUM

Aluminium is lightweight and resistant to rust, it has a beautiful silver sheen, though it can be powder-coated in a number of colours.

Max size: 3000 mm x 1500 mm Thickness: 1.6 mm/2 mm/3 mm Finish: Raw/Powder coated

Application: Indoor or Outdoor

ALUMINIUM COMPOSITE MATERIAL (ACM)

Aluminium Composite Material is a lightweight composite material, consisting of two pre finished aluminium skins over a core.

Max size: 3600 mm x 1200 mm

Thickness: 3 mm

Finish: 50 + colours

Application: Indoor or Outdoor

PVC (Q-BOARD)

PVC is a lightweight foam core material, which is solid on the outside and soft on the inside.

Max size: 2400 mm x 1200 mm **Application:** Indoor or Outdoor

Thickness: 10 mm/16 mm

Finish: Black or White

MEDIUM DENSITY FIBERBOARD (MDF)

MDF is a dense, smooth wood with no recognisable surface grains. Its smooth surface makes it ideal for varnishing or painting.

Max size: 3600 mm x 1800 mm Thickness: 18 mm

Finish: Raw or 2- Pack Polyurethane Painted

Application: Indoor

ACRYLIC OR PERSPEX

Acrylic and Perspex are type of plastic that is lightweight and Impact Resistant


Max size: 3000 mm x 2000 mm Thickness: 3 mm/6 mm


Finish: Clear/ Transparent, Satin Finish, Mirror (16 Colours), Solid Colours, Embossed, Spectral LED -

Light Diffuser for Backlighting

Application: Indoor or Outdoor

Decorative Screens

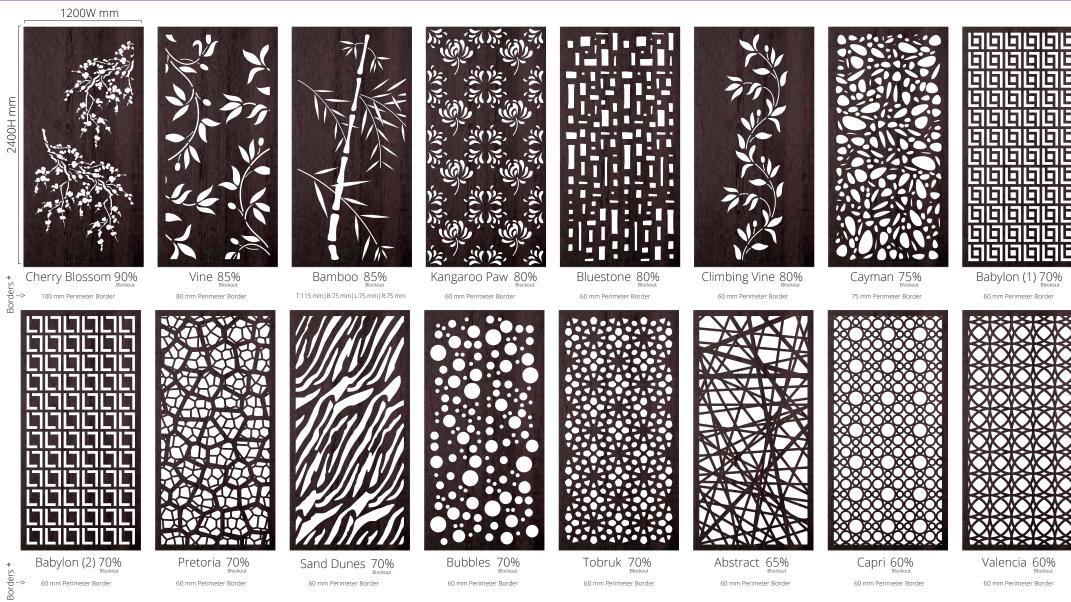


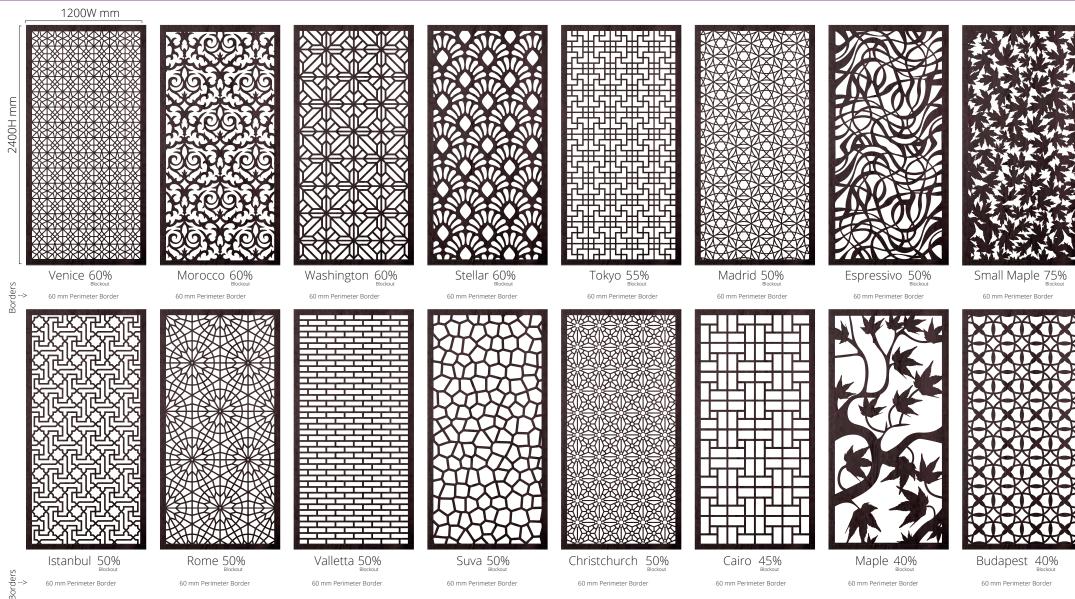


Standard sizes: 1200H mm x 600W mm | 1800H mm x 1200W mm | 1200H mm x 1200W mm | 1800H mm x 1200W mm | 2400H mm x 1200W mm | 2700H mm x 1200W mm | 3000H mm x 1200W mm | 3600H mm x 1200W mm | 3600H

Sequential Screens



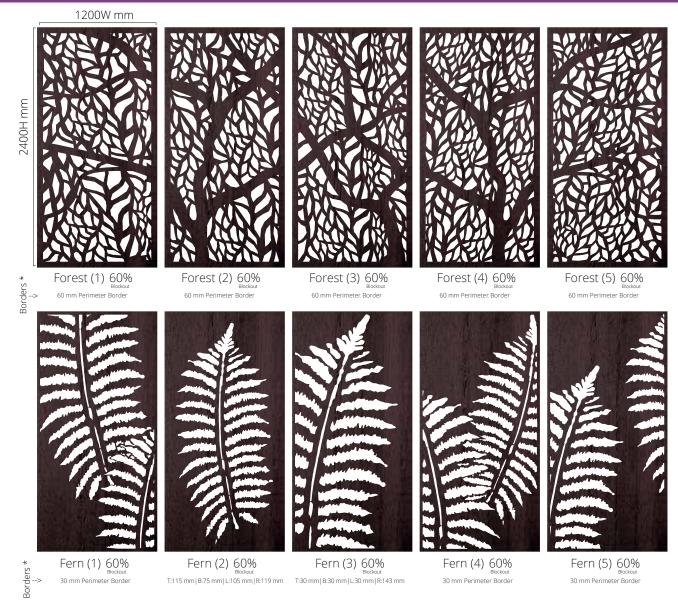


Privacy Screens

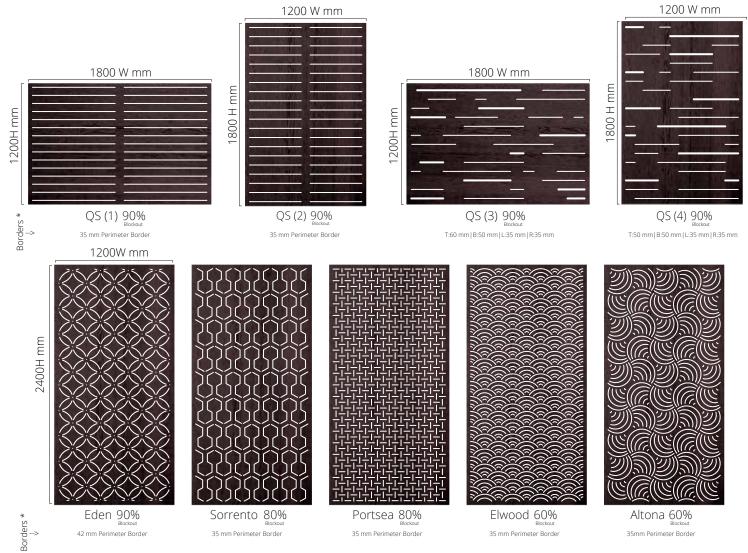

Standard sizes: 1200H mm x 600W mm | 1800H mm x 1200W mm | 1200H mm x 1200W mm | 1800H mm x 1200W mm | 2400H mm x 1200W mm | 2700H mm x 1200W mm | 3000H mm x 1200W mm | 3600H m


Installation Ideas & Recommendations

Stand-off Installation



For more details about our stand-offs please visit: qaq.com.au/standoffguide

Frame-less Installation




Fixing Battens & Screen to the Wall



Wall

Timber Frame Installation




Fencing Lattice Installation



Piano Hinge/ Free Standing Installation




Steel Frame Installation

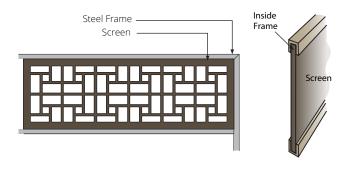

- As a natural product, timber expands or contracts during different weather conditions. Therefore we recommend a gap of at least 2 mm be allowed between screens to allow for natural movement.
- QAQ Screens are NOT A STRUCTURAL PRODUCT and should not be used for load bearing or reinforcement. All installation should be onto an appropriate frame or backing.
- We recommend our screens are secured around all perimeters to a frame or backing at minimum 300mm centres, with fastenings no less than 12 mm from the edge of the screen. If preferred, the screens can be glued to the frames and clamped untill cured, using high grade, waterproof builder's adhesive.



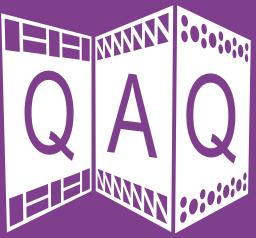

"A screen for every space & every place"

www.qaq.com.au







